

KIA STINGER GT CATCH CAN FITTING INSTRUCTIONS

Tools needed:

- Allen key set
- 10mm spanner
- Hose clamp pliers
- Jubilee hose driver or flat bladed screwdriver

Kit Includes:


- 1x AIRTEC Motorsport Catch Can
- 1x Kia Stinger GT catch can bracket
- 2x Kia Stinger GT hose take offs (8mm & 10mm Tail Fittings)
- 2x Pro Hoses silicone hoses
- 2x M6 Nyloc nuts
- 2x M6 large washers
- 2x M6x12mm Socket head bolts
- 4x M6 Pan Washers
- 2x 20mm Jubilee clips
- 2x 16mm Jubilee clips
- 1x Hose separator

PLEASE THOROUGHLY READ THESE INSTRUCTIONS AND MAKE SURE YOU ARE FAMILIAR WITH THE STEPS BEFORE CARRYING THEM OUT



Instructions:


1. Under the bonnet, locate this hose at the rear, left-hand side of the engine bay and using hose clamp pliers remove the clips securing it in place.

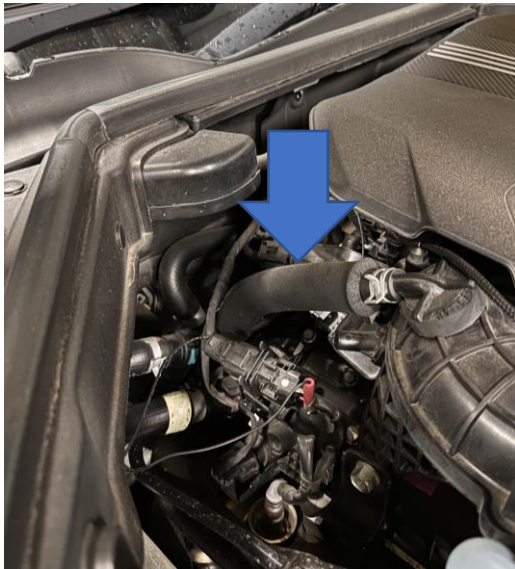

2. Assemble the catch can by installing the bracket to the catch can using the supplied M6 fixings as pictured.



3. Install the bracket and catch can into the car using the two threaded studs highlighted and use the provided M6 nuts with large washers and tighten the bracket to the vehicle.

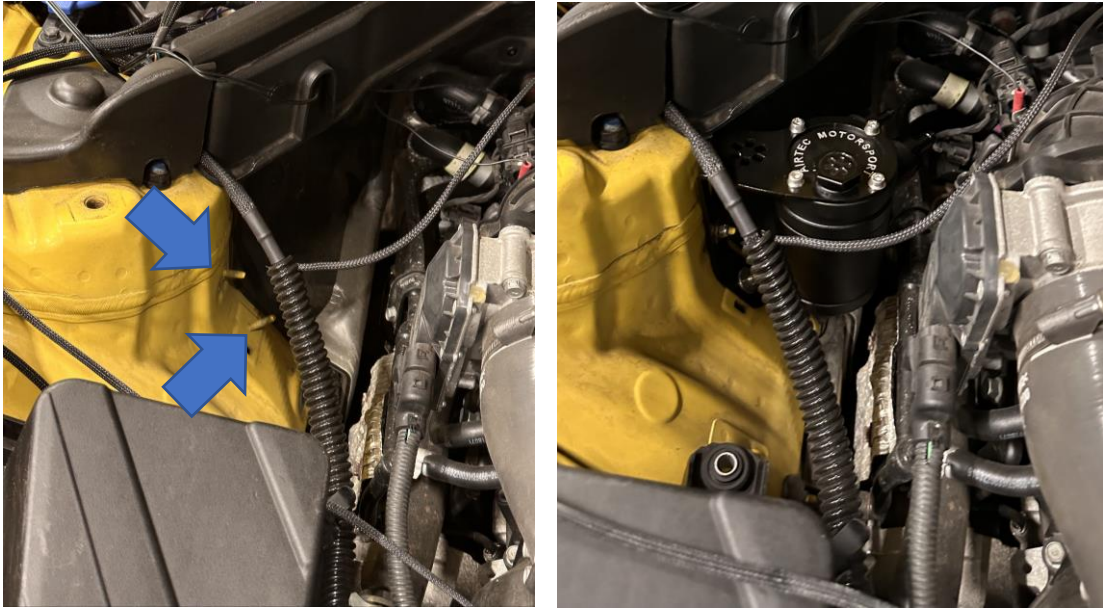

4. Finally, install the supplied hoses with jubilee clips together with the hose separator in the location as pictured. Make sure everything is tight and aligned correctly.

